

Intensium 3

High energy, 3U rack-mount lithium-ion battery system

Intensium 3 has been designed to provide power backup for remote or outside telecom plants like Access Terminals, Base Transceiver Stations, Base Station Controllers. They are also suitable to provide bulk power in Central Offices.


This "all included" stand-alone battery system now provides the benefits of Saft Li-ion technology in a qualified industrial design: Intensium 3 provides maintenance-free energy storage in a reduced volume, combining high operational reliability with outstanding life time under the most difficult environmental conditions.

Features

- Hot-pluggable, rack-mount ETSI format
- Integrated 48 V system containing 2.2 kWh of energy
- Parallel operation, for scalability up to 18 kWh
- Energy density of 136 Wh/dm³, surpassing most advanced VRLA designs
- State of charge and state of health indication
- Built-in battery control for efficient operation
- Redundant safety
- Comprehensive communication
- Compatible with standard telecom rectifiers

Benefits

- Increased energy in given space
- Easy installation and upscaling
- High operational reliability
- Optimized supervision strategy through remote control/diagnostic
- Very long life time
- Preventive but not premature replacement at end of life

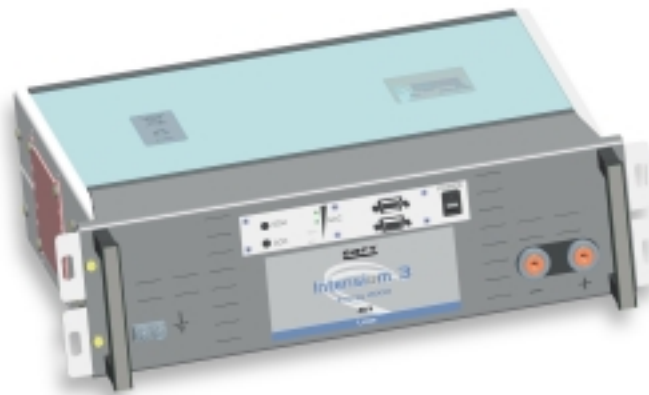

Intensium 3 Energy 2000	
Nominal characteristics	
Nominal Voltage (V)	48
Capacity* (C/8) (Ah)	45
Energy* (C/8) (Wh)	2 280
Volumetric energy density*** (Wh/dm ³)	136
Gravimetric energy density (Wh/kg)	108
Mechanical characteristics	
Width (mm)	419 (19")
Height (mm)	130 (3 U)
Depth (mm)	309
Weight (kg)	21
Electrical characteristics	
Voltage window (V)	40 to 56
Charge voltage range (V)	54.6 to 56.0**
Max. permanent discharge current (A)	75
Peak power (30 s ; +20°C/+68°F) (W)	9 300
Recharge time (h)	24
Faradic charge efficiency (+20°C/+68°F)	99%
Energy charge efficiency (+20°C/+68°F)	96%
Backup time at various loads*	
30 min (W)	3 200
1 hour (W)	1 980
3 hours (W)	690
5 hours (W)	425
8 hours (W)	265
Operating conditions	
Lifetime at +20°C perm (+68°F)	20 years
Lifetime at +40°C (+104°F)	>10 years
Cycle life (80% dod; +20°C/+68°F)	3 000 cycles
Operating temperature	-25°C/+60°C (-13°F/+140°F)
Storage temperature	-40°C/+65°C (-40°F/+149°F)
Transportation regulation compliance	EN 62 281 equivalent to applicable UN regulation
Protection class	IP 41

* Ufloat 56 V Ucutoff 42 V, +20°C/+68°F

** Available capacity is reduced at charge voltages below 56 V

*** Volumetric energy density: 144 Wh/dm³ at +40°C/+104°F



Functional characteristics

Saft Li-ion technology

Intensium 3 contains VLE cells with advanced nickel-based lithium-ion technology:

- Outstanding calendar and cycle life and reliability at high temperature
- Industrial production for high tech-applications such as space & defense, electric vehicles, robots, etc.
- Stable internal resistance over entire life
- High reliability by using high capacity cells: avoids massive cell paralleling within a 48 V module

Control for efficient operation

- On/Off switch
- Active/Sleep (storage, prolonged outage)/Alarm modes
- Charge/Discharge management
- Cell balancing

Mechanical & electrical interface

- ETSI 19 inches, 3U rack-mount design
- M6 female power connector on front panel

Communication

- The battery system informs the user or the application, either via communication interface (CANbus, RS 232, dry-contact...) or visually (LEDs on front panel)
- State of charge, state of health
- Alarm level (minor, major); alarm reason
- Operating conditions (voltage, temperature, identification number)


Safety

Redundant safety design to cope with component failure or abusive conditions:

- At battery system level: electronic board, fuse, separate power switches in charge and discharge circuit
- At 7-cell pack level: electronic board, individual cell voltage monitoring
- At cell level: shutdown-effect separator, mechanical vent & current breaker


Intensium 3 - Energy 2000

Typical discharge at +20°C/+68°F after charge to 56.0 V

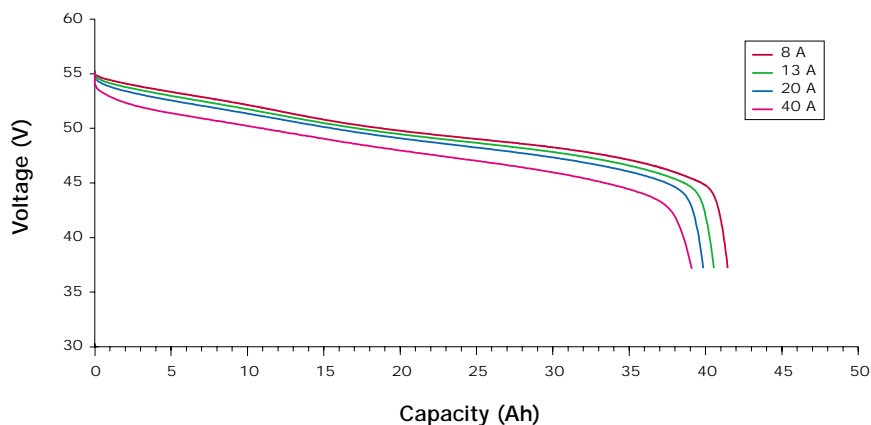

Intensium 3 - Energy 2000

Available energy after charge to 56.0 V

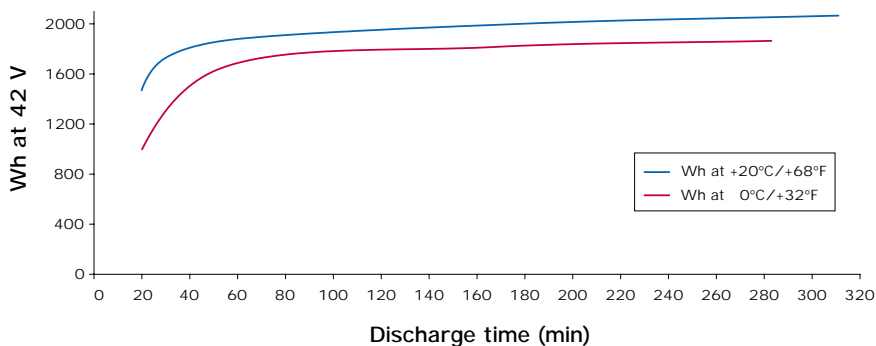

Industrial vision

Intensium has been developed and qualified to suit the demanding requirements of performance and operational reliability telecom OEM's and operators, who are manufacturing or operating high-value, industrial equipment.

Intensium 3 is made of proven components (cells, electronics) which are also employed in demanding space, automotive and other civil applications. Cell manufacturing is carried out on established industrial production lines. Manufacturing plants comply with the legislation in force in each country and with international quality standards (ISO 9001, QS 9000).

Saft Industrial Battery Group

12, rue Sadi Carnot
93170 Bagnole - France
Tel: +33 1 49 93 19 18
Fax: +33 1 49 93 19 64

www.saftbatteries.com

Doc N° 21534-2-0905

Data in this document is subject to change without notice and becomes contractual only after written confirmation.

Société anonyme au capital de 31 944 000 €
RCS Bobigny B 383 703 873

Pragma - Printed in France

