

## 175 Watt Photovoltaic Module – Saturn Technology

# BP 7175

3018E-2 05/04

The BP 7175 forms part of the new high efficiency Saturn 7 Series "real power" range of solar modules. Our industry leading warranty is based on nominal power output and covers the IntegraBus™ bypass diodes, meaning more power for a longer period of time. Being one of the most powerful modules manufactured by BP Solar, the BP 7175 is ideal for installations where high power is needed in a limited area. The BP 7175 has been especially designed for grid connect applications such as large commercial roofs, residential systems and photovoltaic power plants.

### Performance

Rated power	175W
Module efficiency	13.9%
Nominal voltage	24V
Warranty	90% power output over 12 years 80% power output over 25 years Free from defects in materials and workmanship for 5 years

### Configuration

BP 7175S	Clear Universal frame with output cables and polarized Multicontact (MC) connectors
BP 7175L	Unframed laminate version of the BP 7175S

### Qualification Test Parameters

Temperature cycling range	-40°C to +85°C for 200 cycles
Damp heat test	85°C and 85% relative humidity for 1000h
Front & rear static load test (eg: wind)	2400 Pa
Front load test (eg: snow)	5400 Pa
Hailstone impact test	25mm hail at 23m/s from 1m distance

### Quality and Safety


- Manufactured in ISO 9001 and ISO 14003 certified factories
- Conforms to European Community Directives 89/33/EEC, 73/23/EEC, 93/68/EEC
- Certified to IEC 61215

Module power measurements calibrated to World Radiometric Reference through ESTI (European Solar Test Installation at Ispra, Italy)

Framed modules certified by TÜV Rheinland as Safety Class II (IEC 60364) equipment for use in systems up to 1000 VDC

Framed modules listed by Underwriter's Laboratories for electrical and fire safety (Class C fire rating)

Laminates classified by Underwriter's Laboratories for electrical and fire safety (Class C fire rating)

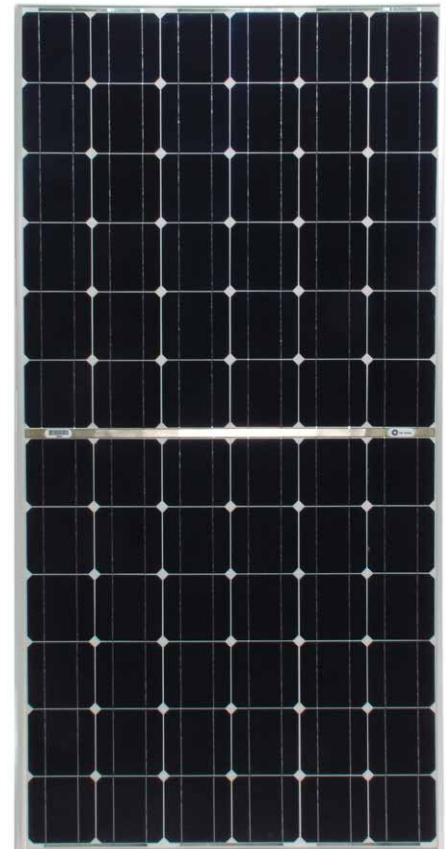


BP 7175S scale 1:14

### Efficiency (%)

9-11	11-12	12-13	13-14	14-15
------	-------	-------	-------	-------


### BP 7175 I-V Curves

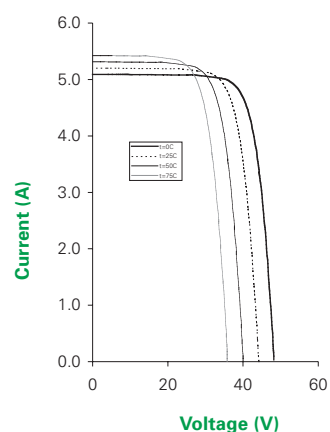

# 175 Watt Photovoltaic Module BP 7175

3018E-2 05/04

## Module Diagram

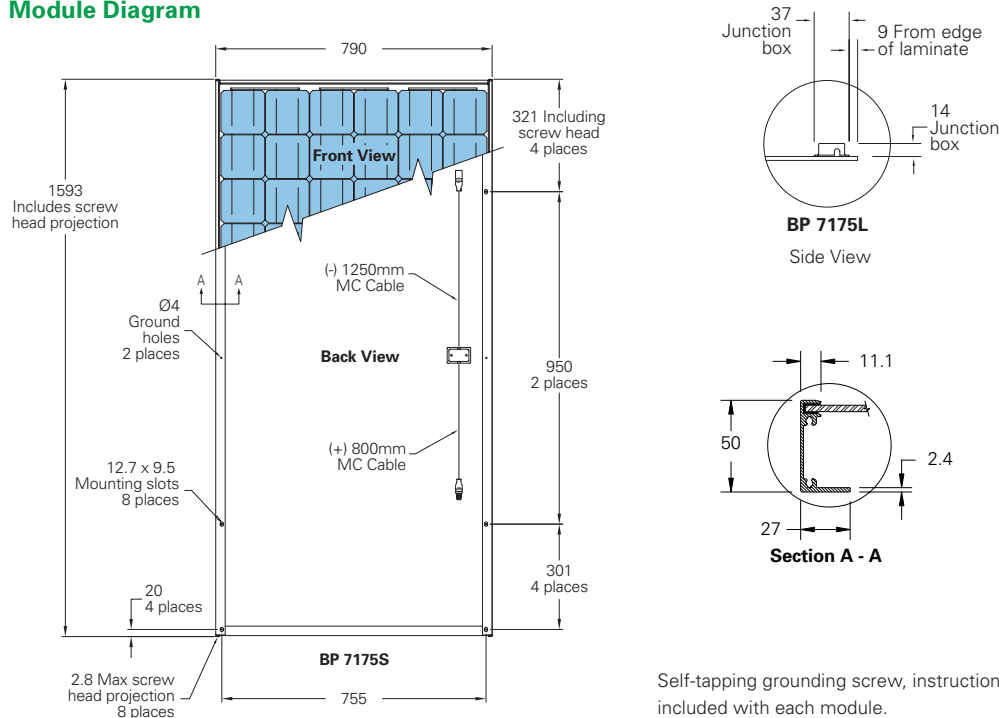

Self-tapping grounding screw, instruction sheet and warranty document included with each module.

## Typical Electrical Characteristics

### BP 7175

Warranted minimum power*	175W
Voltage at $P_{max}$ ( $V_{mp}$ )	36.0V
Current at $P_{max}$ ( $I_{mp}$ )	4.9A
Short circuit current ( $I_{sc}$ )	5.3A
Open circuit voltage ( $V_{oc}$ )	44.4V
Temperature coefficient of $I_{sc}$	(0.065±0.015)%/K
Temperature coefficient of $V_{oc}$	-(160±10)mV/K
Temperature coefficient of $P_{max}$	-(0.5±0.05)%/K
NOCT (Air 20°C; Sun 0.8kW/m <sup>2</sup> ; wind speed 1m/s)	47±2°C
Maximum series fuse rating	15A
Maximum system voltage	600V (IEC 61215 rating) 1000V (TÜV Rheinland rating)

\*As measured by BP Solar test equipment to the nearest watt.

Standard test conditions - irradiance of 1000W/m<sup>2</sup> at an AM1.5G solar spectrum and a temperature of 25°C.

## Mechanical Characteristics

### BP 7175S

### BP 7175L

	BP 7175S	BP 7175L
Dimensions (mm) (Overall tolerances +/-3mm)	1593 x 790 x 50	1580 x 783 x 19
Weight (kg)	15.4	12.4
Frame	Clear anodised aluminium alloy type 6063T6. Silver Universal frame	
Solar cells	72 cells (125mm x 125mm) configured geometrically for a 6 x 12 matrix connected in series.	
Output cables	RHW AWG# 12 (3.3mm <sup>2</sup> ) cable with polarized weatherproof DC rated Multicontact connectors; asymmetrical lengths -1250mm (-) and 800mm (+).	
Diodes	IntegraBus™ technology includes for every 12 cells a Schottky by-pass diode integrated into the printed circuit board bus.	
Construction	Front: High transmission 3mm tempered glass; Rear: White tedlar; Encapsulant: EVA.	

Your BP Solar Distributor:

